



INSTRUCTIONS

GEK-6863A
SUPersedes GEK-6863

Instantaneous Auxiliary Relay

TYPES

HLA11A HLA11B

POWER SYSTEMS MANAGEMENT DEPARTMENT

GENERAL ELECTRIC

PHILADELPHIA, PA.

GEK-6863 Instantaneous Auxiliary Relay Type HLA

Cover (8036991)

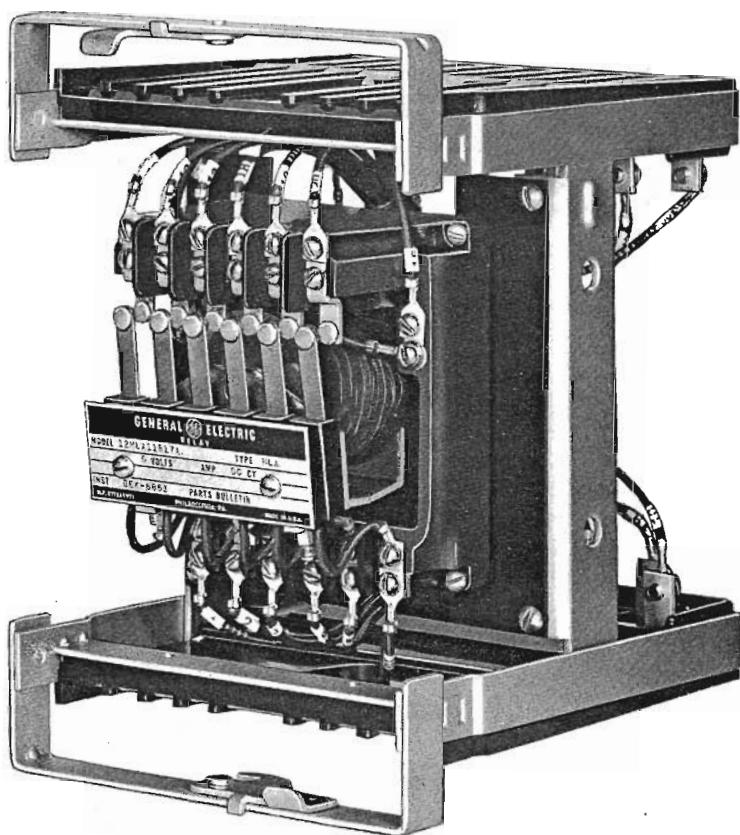


Fig. 1 (8036992) Type HLAllB Removed From Case (Front View)

INSTANTANEOUS AUXILIARY RELAY

TYPE HLA11A & HLA11B

INTRODUCTION

The relay Type HLA covered by these instructions consists of one hinged armature unit assembled in a single unit case of drawout construction.

RATINGS

The Type HLA relay is available with coil ratings for standard voltages up to 230 volts at 25, 50, or 60 cycles a-c, and up to 250 volts d-c.

The contacts will make and carry 12 amperes continuously or 30 amperes for 1 minute, and will interrupt the currents listed in the following table:

	D.C.				A.C.		
Volts	24	48	125	250	115	230	460
Amps	12	6	3	1	25	15	5

RECEIVING, HANDLING AND STORAGE

These relays, when not included as part of a control panel will be shipped in cartons designed to protect them against damage. Immediately upon receipt of a relay, examine it for any damage sustained in transit. If injury or damage resulting from rough handling is evident, file a damage claim at once with the transportation company and promptly notify the nearest General Electric Apparatus Sales Office.

Reasonable care should be exercised in unpacking the relay in order that none of the parts are injured or the adjustments disturbed.

If the relays are not to be installed immediately, they should be stored in their original cartons in a place that is free from moisture, dust and metallic chips. Foreign matter collected on the outside of the case may find its way inside when the cover is removed and cause trouble in the operation of the relay.

DESCRIPTION

The Type HLA relay consists of a single hinged armature unit mounted in a double ended, single unit drawout case. The hinged armature unit has six electrically separate contact circuits adaptable for either circuit opening or circuit closing application. The flat armature is attracted to a polepiece by the magnetic field of an operating coil and is restrained by a control spring. The armature, magnet assembly and contact assemblies are all mounted on a molded compound base and the unit or units are fastened to the relay cradle.

BURDENS

D-C COILS				A-C COILS		
Coil Rating Volts	R Ohms	Watts	Coil V	Rating Cyc.	Z Ohms	Volt-Amps.**
250	15,500	4.1				
125	3,650	4.3				
48	510	4.5	230	60	3,800	13.9
32	250	4.1	115	60	1,000	13.2
24	160	3.6				
12	42	3.5				
6	10	1.5	230	50	4,250	12.4
			115	50	1,020	13.0
			230	25	7,070	7.5
			115	25	1,768	7.45

**Armature in the closed position. With the armature in the open position, the burdens are increased by approximately 100 percent of the values listed above.

INSTALLATION

LOCATION

The location should be clean and dry, free from dust and excessive vibration, and well lighted to facilitate inspection and testing.

These instructions do not purport to cover all details or variations in equipment nor to provide for every possible contingency to be met in connection with installation, operation or maintenance. Should further information be desired or should particular problems arise which are not covered sufficiently for the purchaser's purposes, the matter should be referred to the General Electric Company.

MOUNTING

The relay should be mounted on a vertical surface. The outline and panel drilling dimensions are shown in Fig. 3.

CONNECTIONS

The internal connection diagrams for the HLA-11A and HLA11B relays are shown in Figs. 1 and 2 respectively.

One of the mounting studs or screws should be permanently grounded by a conductor not less than No. 12 B & S gage copper wire or its equivalent.

Optional shorting bars for normally closed contacts are provided on the HLA11A relay. If a continuous circuit through a normally closed contact is desired even when the connection plug is removed from the relay, shorting bars should be used.

MAINTENANCE

Auxiliary relay equipment should be checked for operation at regular intervals, preferably at the same time that the associated protective devices are inspected. The units should be checked for pick-up and drop-out values. Normally these settings should not require readjustment but if changes are necessary the points discussed under ADJUSTMENTS should be observed.

CONTACT CLEANING

For cleaning fine silver contacts, a flexible burnishing tool should be used. This consists of a flexible strip of metal with an etched roughened surface, resembling in effect a superfine file. The polishing action is so delicate that no scratches are left, yet corroded material will be removed rapidly and thoroughly. The flexibility of the tool insures the cleaning of the actual points of contact. Sometimes an ordinary file cannot reach the actual points of contact because of some obstruction from some other part of the relay.

Fine silver contacts should not be cleaned with knives, files, or abrasive paper or cloth. Knives or files may leave scratches which increase

arching and deterioration of the contacts. Abrasive paper or cloth may leave minute particles of insulating abrasive material in the contacts and thus prevent closing.

The burnishing tool described above can be obtained from the factory.

ADJUSTMENTS

The relays for direct current service are adjusted at the factory to pick up at 60 percent of their rating when cold and 80 percent or slightly less after continuous service. The relays for alternating current service are adjusted to pick-up at 80 percent of their rating or slightly less. This pick up value will not change during continuous service since normal heating of the operating coil has little effect on the total a-c impedance. Normally it should not be necessary to readjust the control spring. If the proper adjustment does not exist, the pick-up may be adjusted by changing the armature gap which is controlled by the two adjusting screws which are located at the armature hinge.

Any contact circuit can be changed from circuit opening to circuit closing, or vice versa, by removing the fixed contact, turning it over, and replacing it. After the change the contacts should be checked to see that all circuit closing contacts reclose simultaneously when the relay is allowed to drop out. All moving contacts should have approximately 1/32 inch wip when in their operated position. It may be necessary to bend the moving contact arms to realize these requirements. If readjustment by bending of the moving contact arms is required, relay pickup value should be rechecked. Excessive normally open contact wipe may cause two step armature operation.

RENEWAL PARTS

It is recommended that sufficient quantities of renewal parts be carried in stock to enable the prompt replacement of any that are worn, broken, or damaged. When ordering renewal parts, address the nearest Sales Office of the General Electric Company, specifying the quantity required and describing the parts by catalogue numbers as shown in Renewal Parts Bulletin No. GEF-2623.

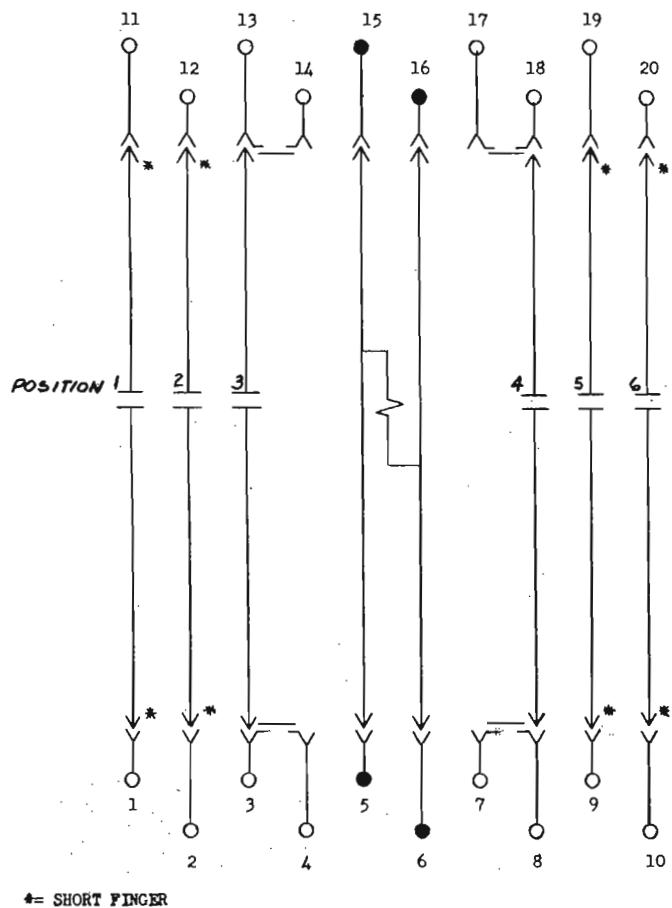


Fig. 2 (0195A4957-2) Internal Connections For Relay Type HLA11A (Front View)

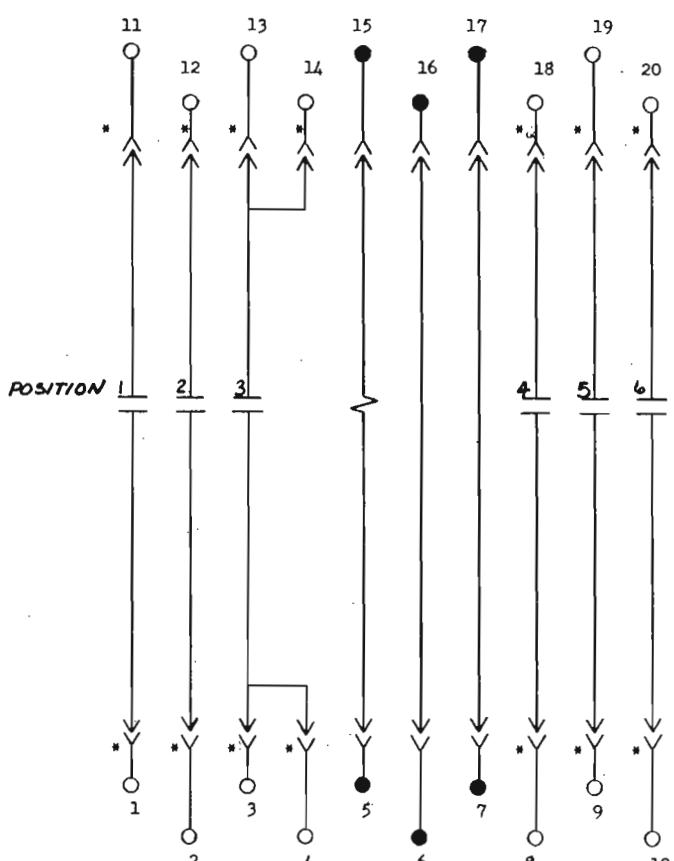


Fig 3. (0195A4960-1) Internal Connections For Relay Type HLA11B (Front View)

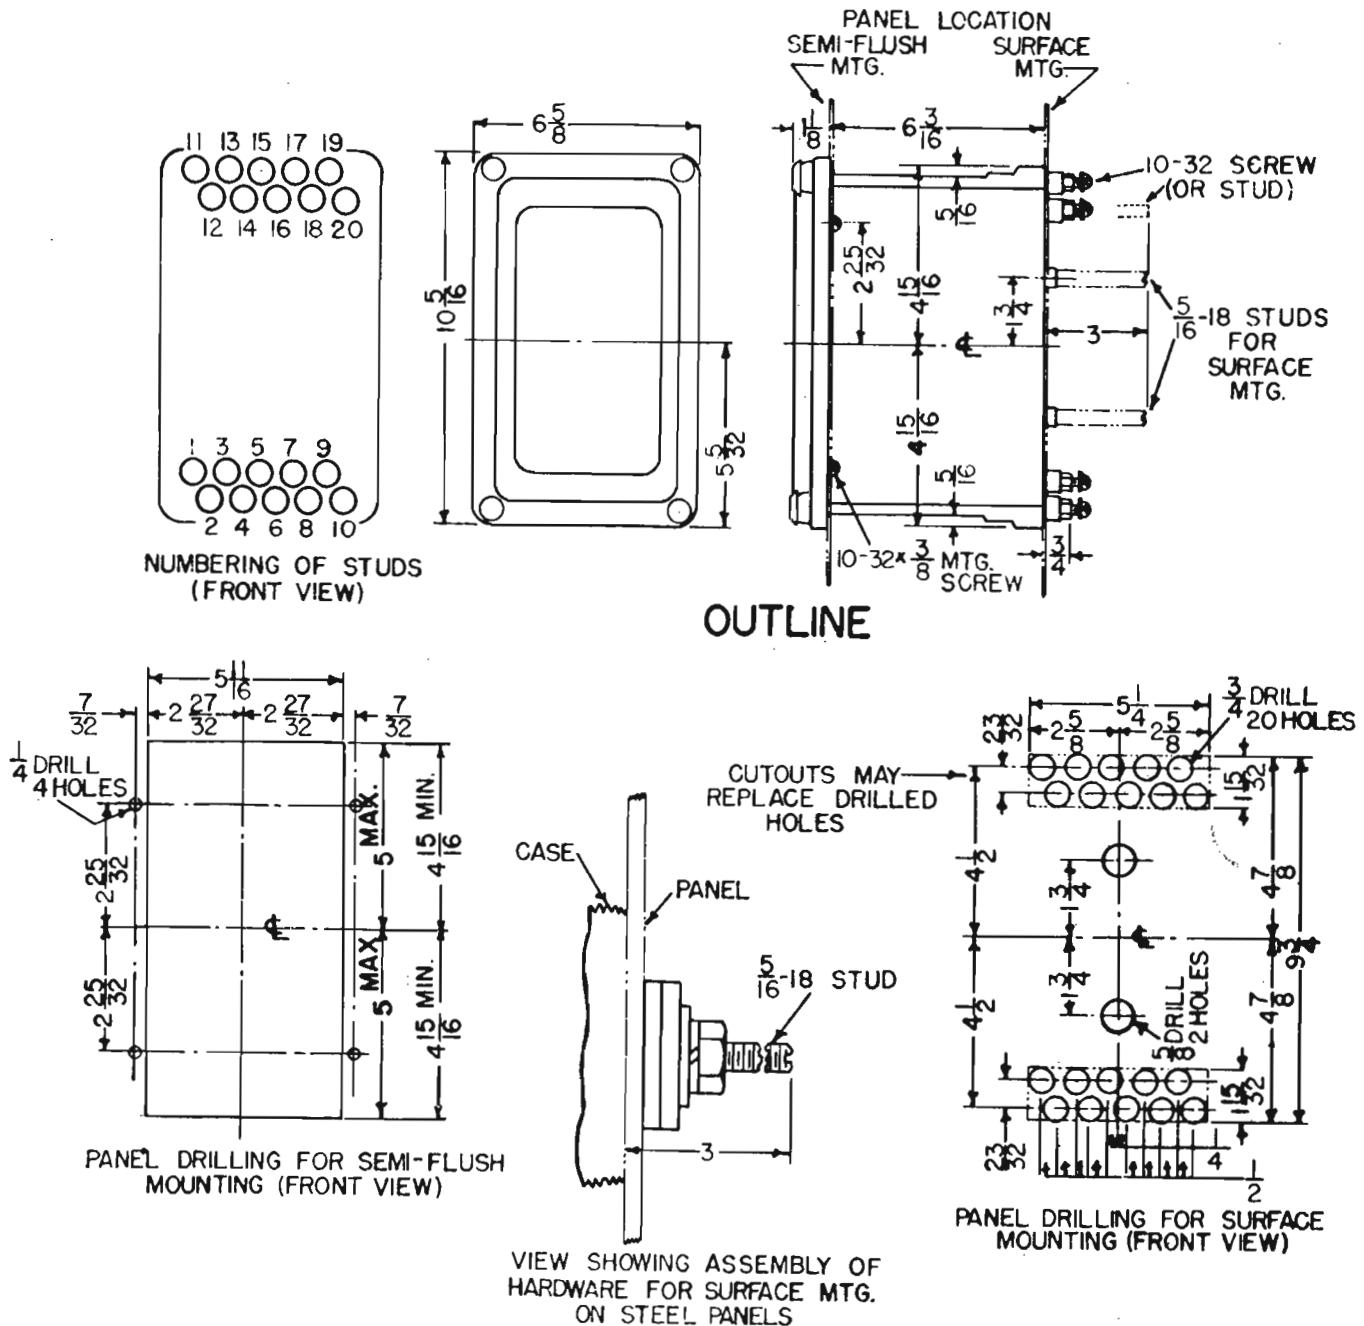


Fig. 4 (6209272-2) Outline And Panel Drilling Dimensions For The HLAl1A and HLAl1B Relay

READY TO ASSIST YOU... When You Have Electrical Problems... Need Further Information... Require Ordering Instructions

KEY TO SALES OPERATIONS

A - Agency & Distributor
 C - Components Sales
 I - Industrial Sales
 M - Marine & Defense Facilities Sales
 U - Electric Utility Sales

LOUISIANA	
A U	Alexandria 71301 . . . 2001 MacArthur Dr.
I	Baton Rouge 70815 . . . 633 Oak Villa Blvd.
I	Lake Charles 70601 . . . 1424 Ryan St.
A I	New Orleans 70125 . . . 4747 Earhart Blvd.
M U	New Orleans 70112 . . . 225 Baronne St.
A U	Shreveport 71101 . . . 400 Travis St.
I	West Monroe 71291 . . . 500 Natchitoches St.
MAINE	
U	Augusta 04330 . . . 152 State St.
I	Bangor 04402 . . . 77 Central St.
MARYLAND	
A I U	Baltimore 21201 . . . 1 N. Charles St.
A U	Hagerstown 21740 . . . 49 E. Franklin St.
A	Salisbury 21801 . . . P. O. Box 424
MASSACHUSETTS	
I U	Boston 02117 . . . 31 St. James Ave.
I	Springfield 01103 . . . 120 Maple St.
C	Wellesley 02181 . . . 1 Washington St.
MICHIGAN	
A C I U	Detroit 48202 . . . 700 Antoinette St.
I	Flint 48502 . . . 801 S. Saginaw St.
A C I	Grand Rapids 49508 . . . 2821 Madison Ave., S.E.
A U	Jackson 49201 . . . 210 W. Franklin St.
A I	Saginaw 48607 . . . 2nd National Bank Bldg.
MINNESOTA	
I U	Duluth 55802 . . . 14 W. Superior St.
A U	Fergus Falls 56537 . . . 201 1/2 Lincoln Ave., W.
C	Minneapolis 55424 . . . 4018 W. 65th St.
A I U	Minneapolis 55416 . . . 1500 Lilac Dr. S
MISSISSIPPI	
U	Gulfport 39502 . . . P. O. Box 33
A I	Jackson 39206 . . . 333 No. Mart Plaza
U	Jackson 39205 . . . Rm. 917 Electric Bldg
MISSOURI	
A	Joplin 64802 . . . 310 Wall St.
A I U	Kansas City 64105 . . . 911 Main St.
A C I U	St. Louis 63101 . . . 1015 Locust St.
MONTANA	
A	Billings 59101 . . . 312 Transwestern Life Bldg
A I U	Butte 59701 . . . 103 N. Wyoming St.
NEBRASKA	
A I U	Omaha 68102 . . . 409 S. 17th St.
NEVADA	
U	Las Vegas 89106 . . . 1711 S. 8th St.
NEW HAMPSHIRE	
A	Manchester 03104 . . . 46 Bay St.
NEW JERSEY	
A C I M	East Orange 07017 . . . 6 Washington St.
NEW MEXICO	
A C I M	Albuquerque 87108 . . . 120 Madeira Dr. N.E.
NEW YORK	
A I M	Albany 12206 . . . 8 Colvin Ave.
A U	Binghamton 13902 . . . 40 Front St.
A C I U	Buffalo 14202 . . . 625 Delaware Ave.
A	Elmira 14901 . . . 100 Woodlawn St.
A I M	Erlinsford 10523 . . . 44 N. Central Ave.
A C I M	New York 10022 . . . 641 Lexington St.
A U	Rochester 14618 . . . 3380 Monroe Ave.
A I U	Rochester 14604 . . . 339 East Ave.
A C I U	Syracuse 13206 . . . 2360 James St.
A I U	Syracuse 13206 . . . 3532 James St.
NORTH CAROLINA	
A C I U	Charlotte 28207 . . . 141 Providence Rd.
A I	Greensboro 27405 . . . 801 Summit Ave.
A U	Raleigh 27603 . . . 120 N. Boylston Ave.
NORTH DAKOTA	
U	Bismarck 58501 . . . 418 Rosser Ave.
OHIO	
I U	Akron 44313 . . . 2858 W. Market St.
A	Akron 44313 (Agency & Distributor) . . . 2855 W. Market St.
I U	Canton 44703 . . . 515 Third St., N.W.
A C I U	Cincinnati 45206 . . . 2621 Victory Pkwy.
C	Cleveland 44116 . . . 20950 Center Ridge Rd.
PENNSYLVANIA	
A I U	Allentown 18103 . . . 668 E. Highland St.
C	Johnstown 15902 . . . 841 Oak St.
A I U	Philadelphia 19124 . . . 1040 E. Erie Ave.
A	(Pittsburgh) West Mifflin, Pa. 15122 . . . 4930 Buttermilk Hollow Rd., R.D. #1
I	York 17403 . . . 54 N. Harrison St.
TEXAS	
A I U	Abilene 79601 . . . 442 Cedar St.
U	Amarillo 79101 . . . 303 Polk St.
A I U	Beaumont 77701 . . . 1385 Calder Ave.
U	Corpus Christi 78401 . . . 205 N. Chaparral St.
A C I U	Dallas 75247 . . . 8101 Stemmons Freeway
A I U	El Paso 79901 . . . 215 N. Stanton St.
A	Fort Worth 76107 . . . 100 N. Univ. Dr.
U	Fort Worth 76102 . . . 408 W. 7th St.
A C I U	Houston 77027 . . . 4210 Richmond Ave.
A I	Lubbock 79404 . . . 500 E. 50th St.
A I	Midland 79704 . . . 122 N. "N" St.
A U	San Antonio 78204 . . . 419 S. Main Ave.
UTAH	
A I U	Salt Lake City 84101 . . . 431 S. Third E St.
C	Salt Lake City 84110 . . . 2425 S. 8th St. W.
VERMONT	
U	Rutland 05702 . . . 38 1/2 Center St.
VIRGINIA	
A M	Newport News 23601 . . . 311 Main St.
A I U	Richmond 23230 . . . 1508 Willow Lawn Dr.
A I U	Roanoke 24016 . . . 920 S. Jefferson St.
WASHINGTON	
U	Pasco 99301 . . . 624 W. Lewis St.
A I M U	Seattle 98188 . . . 112 Andover Park, E.
A I U	Spokane 99220 . . . E. 1805 Trent St.
WEST VIRGINIA	
A I	Charleston 25328 . . . 306 MacCorkle Ave. SE
I U	Fairmont 26555 . . . 310 Jacobs Bldg.
A	Huntington 25701 . . . 1401 Sixth Ave.
I	Wheeling 26002 . . . 40 14th St.
WISCONSIN	
A I U	Appleton 54911 . . . 3003 W. College Ave.
U	Madison 53703 . . . 340 W. Washington Ave.
C	Milwaukee 53226 . . . Mayfair Plaza, 2421 W. Mayfair Rd.
A I U	Milwaukee 53202 . . . 616 E. Michigan St.
CANADA	
	Canadian General Electric Company, Ltd.
	Toronto

GENERAL ELECTRIC SERVICE SHOPS

WHEN YOU NEED SERVICE... These GE service shops will repair, re-condition, and rebuild your electric apparatus. The facilities are available day and night, seven days a week, for work in the shops or on your premises.

ises. Latest factory methods and genuine GE renewal parts are used to maintain peak performance of your equipment. For full information about these services, contact your nearest service shop or sales office.

ALABAMA	
B	Birmingham 35211 . . . 1500 Mims Ave., S.W.
ARIZONA	
(Phoenix) Glendale 85301 . . . 4911 West Colter St.	
CALIFORNIA	
Inglewood 90301 . . . Los Angeles Instrumentation Service	
Los Angeles 90001 . . . 6900 Standard Ave.	
Oakland 94608 . . . 3400 Wood St.	
Sacramento 95814 . . . 99 North 17th St.	
San Francisco 94103 . . . 1098 Harrison St.	
COLORADO	
Denver 80205 . . . 3353 Larimer St.	
CONNECTICUT	
(Southington) Plantsville 06479 . . . 370 Atwater St.	
FLORIDA	
Jacksonville 32203 . . . 2020 W. Beaver St.	
(Miami) Hialeah 33010 . . . 1062 E. 28th St.	
Tampa 33601 . . . P. O. Box 1245	
GEORGIA	
(Atlanta) Chamblee 30005 . . . 5035 Peachtree Industrial Blvd.	
ILLINOIS	
Chicago 60638 . . . 6045 S. Nottingham Ave.	
INDIANA	
Ft. Wayne 46803 . . . 1731 Edsall Ave.	
Indianapolis 46222 . . . 1740 W. Vermont St.	
IOWA	
(Davenport) Bettendorf 52722 . . . 1025 State St.	
KENTUCKY	
Louisville 40209 . . . 3900 Crittenden Dr.	
LOUISIANA	
New Orleans 70114 . . . 1115 De Armas St.	
MARYLAND	
Baltimore 21230 . . . 920 E. Fort Ave.	
MASSACHUSETTS	
(Boston) Medford 02155 . . . 3960 Mystic Valley Parkway	
MICHIGAN	
Detroit 48202 . . . 5950 Third St.	
Flint 48505 . . . 1506 E. Carpenter Rd.	
MINNESOTA	
Minneapolis 55430 . . . 2025-49th Ave., N.	
W. Duluth 55807 . . . P. O. Box 7198	
MISSOURI	
Kansas City 64120 . . . 3525 Gardner Ave.	
St. Louis 63110 . . . 1115 East Road	
NEW YORK	
Albany 12205 . . . 1097 Central Ave.	
Buffalo 14211 . . . 318 Urban St.	
Clifton, N.J. 07012 . . . New York Instrumentation Service	
North Bergen, N.J. 07047 . . . Schenectady 12305 . . . 6001 Tonelle Ave.	
Instrumentation Service 1 River Road	
Syracuse 13208 . . . 1015 E. Hiawatha Blvd.	
NORTH CAROLINA	
Charlotte 28208 . . . 2328 Thrift Road	
OHIO	
Cincinnati 45202 . . . 444 W. Third St.	
Cleveland 44125 . . . 4477 East 49th St.	
Columbus 43223 . . . 2128 Eakin Rd.	
Toledo 43605 . . . 405 Dearborn Ave.	
Youngstown 44507 . . . 272 E. Indianola Ave.	
OREGON	
Portland 97210 . . . 2727 N.W. 29th Ave.	
PENNSYLVANIA	
Allentown 18103 . . . 668 E. Highland St.	
Johnstown 15902 . . . 841 Oak St.	
Philadelphia 19124 . . . 1040 E. Erie Ave.	
(Pittsburgh) West Mifflin, Pa. 15122 . . . 4930 Buttermilk Hollow Rd., R.D. #1	
York 17403 . . . 54 N. Harrison St.	
TENNESSEE	
Knoxville 37914 . . . 2621 Gov. John Sevier Hwy.	
Memphis 38107 . . . 708 No. Main St.	
TEXAS	
Corpus Christi 78401 . . . 115 Waco St.	
Dallas 75235 . . . 3202 Manor Way	
Houston 77020 . . . 5534 Harvey Wilson Dr.	
Midland 79704 . . . 704 S. Johnston St.	
UTAH	
Salt Lake City 84110 . . . 301 S. 7th West St.	
VIRGINIA	
Richmond 23224 . . . 1403 Ingram Ave.	
Roanoke 24007 . . . 115 Albermarle Ave., S.E.	
WASHINGTON	
Seattle 98134 . . . 3422 First Ave., S.	
Spokane 99211 . . . E. 4323 Mission St.	
WEST VIRGINIA	
Charles 25328 . . . 306 MacCorkle Ave., S.E.	
WISCONSIN	
Appleton 54910 . . . P.O. Box 83	
Menasha . . . 664 Valley Rd.	
Milwaukee 53207 . . . 235 W. Oklahoma Ave.	

GENERAL ELECTRIC COMPANY, PHILADELPHIA, PA.